

SUBDIVISION AND LAND DEVELOPMENT


22 Attachment 2

City of Hermitage

COMMERCIAL, INDUSTRIAL & COLLECTOR STREETS

Typical Cross-Sections


(NOT TO SCALE)

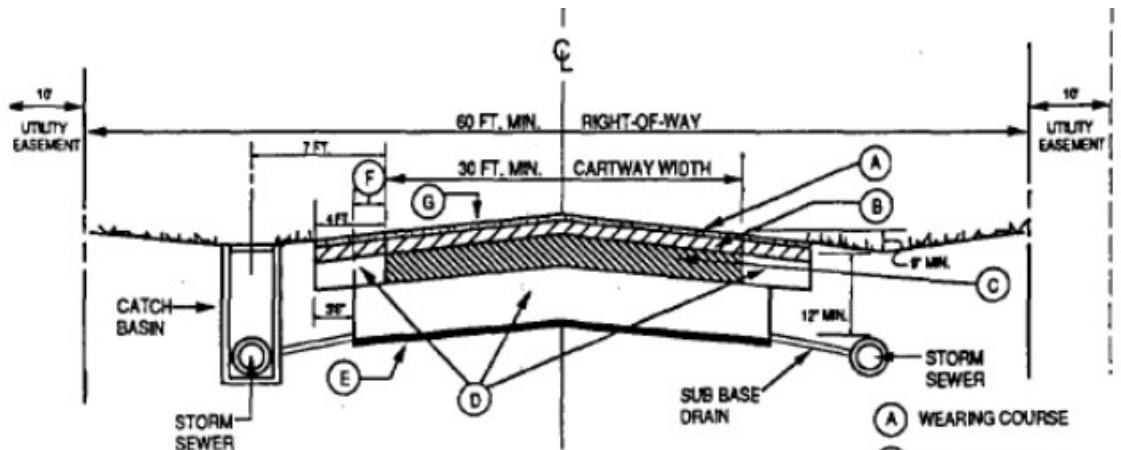

ALTERNATE A - NO CURBING

NOTE: STORM SEWER REQUIRED ON BOTH SIDES OF STREET

- (A) WEARING COURSE
- (B) BINDER COURSE
- (C) BITUMINOUS CONCRETE BASE COURSE
- (D) SUB BASE
- (E) SUB BASE GEOTEXTILE FABRIC
- (F) SUB BASE TO EXTEND 6 IN. BEYOND PAVEMENT
- (G) 3/8' FT. MIN. - 3/8' FT. MAX. CROWN SLOPE

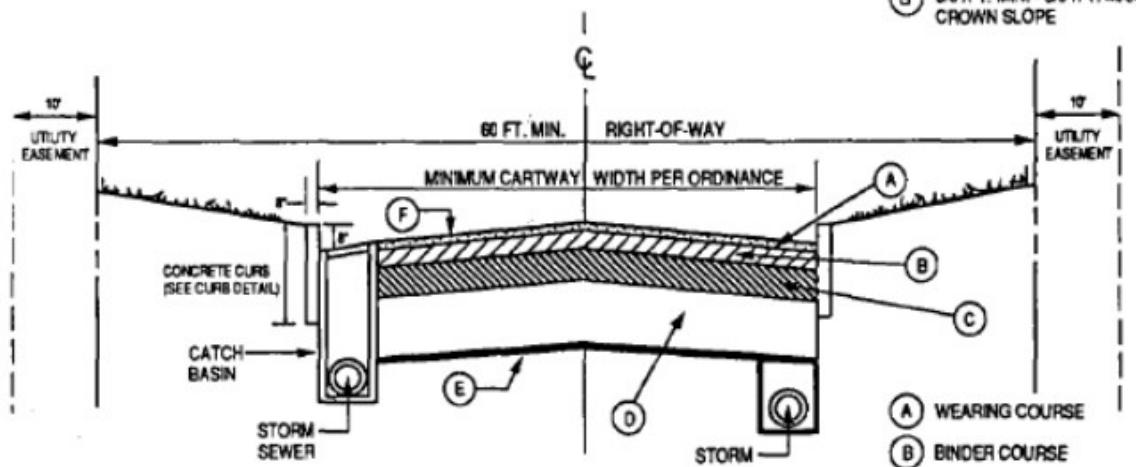

ALTERNATE B - CONCRETE CURB

NOTE: STORM SEWER REQUIRED ON BOTH SIDES OF STREET

- (A) WEARING COURSE
- (B) BINDER COURSE
- (C) BITUMINOUS CONCRETE BASE COURSE
- (D) SUB BASE
- (E) SUB BASE GEOTEXTILE FABRIC
- (F) 3/8' FT. MIN. - 3/8' FT. MAX. CROWN SLOPE

